



uMobility

uMobility User's Guide

Apple iPhone™ and iPod Touch™

© 2003-2010 Varaha Systems, Inc. All Rights Reserved.

This document is the confidential property of Varaha Systems, Inc. No part of this document may be reproduced or transmitted in any form or by any means, electronic or otherwise, including photocopying, reprinting, scanning, or recording, for any purpose, without the express written permission of Varaha Systems, Inc.

TRADEMARKS

uMobility is a trademark of Varaha Systems, Inc. All other company, brand, product or service names mentioned herein are the trademarks or registered trademarks of their respective owners.

DISCLAIMER

Information in this document is subject to change without notice and should not be construed as a commitment on the part of Varaha Systems, Inc. Varaha Systems, Inc. does not assume any responsibility or make any warranty against errors that may appear in this document.

Varaha Systems, Incorporated
2650 Valley View Lane
Building 1, Suite 200
Dallas, Texas 75234
Tel: +1-972-241-2151
Fax: +1-972-243-1505
E-mail: info@varaha.com
Visit us at: <http://www.varaha.com>





Table of Contents

Introduction	3
iPhone or iPod Touch Use Cases	3
How to Use this Guide	4
Installing uMobility on The Apple iPhone	5
Device Requirements	5
Getting Started with uMobility	7
Configuring uMobility	7
In Call Options	17
Moving Calls Between Networks (Handoff)	18
Advanced Options With uMobility	23
Transfer a Call With uMobility	23
Add Call With uMobility	27
Uninstalling uMobility	32
Limitations With uMobility	33
Known Issues	33
Log Settings	34
Configuring iPhone to Work with a Wi-Fi Network	34
Appendix A – End User License Agreement	35



Introduction

uMobility was designed to enhance the mobile experience by bringing features and functionalities from office or residential services right to the smart phone. uMobility enables the user to:

- Answer the office or home phone (depending on the type of uMobility service) from the smart phone – anytime, anywhere
- Make calls from the smart phone that uses the office or home's default number
- Enjoy greatly improved cell phone coverage inside the office or home
- Never miss an important call again while away from the desk or home
- Talk on the smart phone and not use any cellular network minutes when in a Wi-Fi hotspot
- Access work or home voice mail from the smart phone
- Stop juggling between the cell phone and the office phone or home phone

iPhone or iPod Touch Use Cases

Please note the uMobility client software can be used in one of several ways in both the iPhone as well as the iPod Touch. Examples of these usage methods are as follows:

- The client for iPhone or iPod Touch can be used in conjunction with the network-based uMobility controller (uMC). This method would be supported by the communications carrier of your choice. The user will receive a few pieces of registration information via email to be entered as Settings for the uMobility client. These settings will complete the installation of the client software on the device and get you up and calling in no time.
- The client can also be used along with a uMobility Controller (uMC) with a number of IP PBXes (e.g., Toshiba Strata CIX, NEC 8100) or Call Managers (e.g., Cisco CUCM). Please contact your solution provider (e.g., dealer) or Systems Administrator (SysAdmin) to find out if the iPhone/iPod Touch is supported in your network as well as for further information on how to set up and register the device in that network.
- Finally, the uMobility client can be used as a stand-alone Wi-Fi dialer when connected to an open source IP PBX (e.g., Asterisk) or Toshiba IP PBX (Strata CIX). Please NOTE that this implementation scenario is done entirely at the user's risk and is not a directly supported by Varaha or its sales channels.



How to Use this Guide

This guide assists with the installation of uMobility on the smart phone in order to get started using uMobility as quickly as possible.

- To install uMobility, skip to the next section, *Installing uMobility on the Apple iPhone*
- If uMobility is already installed on the smart phone and Wi-Fi has not been configured – skip to section 2, *Configuring uMobility to Work with a Wi-Fi Network*.
- If uMobility is already installed on the smart phone and Wi-Fi has been configured – skip to section 3, *Using uMobility*, to learn how to use uMobility.
- Section 4, *Other uMobility Options*, explains how to access the contacts and call logs from uMobility and how to exit uMobility.



Installing uMobility on The Apple iPhone

In the current release uMobility is installed on iPhone using either the iTunes application software from Apple or by accessing that same App Store directly from the iPhone's application for that purpose.

In order to download the uMobility application, the user must have a valid account for the Apple App Store.

Device Requirements

The iPhone is supported with OS version 3.0 or higher.

The iPhone 3G is supported with OS version 3.0 or higher.

The iPhone 3G S is supported with OS version 3.0 or higher.

The iPod Touch must be at least a 2nd generation device (audio port for microphone) and have OS version 3.0 or higher.

Downloading uMobility using a Computer

1. Launch the iTunes application from the computer (Mac or PC).
2. Enter in a valid username and password when logging in to the App Store.
3. Search for the company name “Varaha Systems” or “uMobility” in order to locate the uMobility application on the App Store.
4. Select the uMobility application from the list and then click Download.
5. The uMobility application will begin the downloading process after the users credentials have been validated. If asked for the username and password again, enter that information now.
6. When the download is completed, the uMobility application will then be available to load onto the iPhone using the iTunes application.
7. Connect the iPhone to the computer using the supplied cable.
8. Synchronize the iPhone with the computer using the instructions provided by Apple. Please note that the user will need to select the uMobility application from the Applications list in order for uMobility to be moved to the iPhone.
9. When the Sync process is completed, the iPhone's screen will blank for an interval while the Sync process completes. When the screen refreshes, the uMobility application is ready for configuration.

When an upgrade for the uMobility application becomes available, repeat these steps and if asked, confirm by clicking **Yes** to replace the application already in place in the iTunes



library. The next time the end user syncs the iPhone, the updated uMobility client will be loaded onto the iPhone device.

Downloading uMobility using the iPhone or iPod Touch

1. Be sure that the iPhone's battery is fully charged before beginning the installation, or plug the iPhone into a USB or electrical outlet to ensure the iPhone does not run out of battery during the installation.
2. Launch the App Store application on the iPhone from the main screen (JumpScreen).
3. Press the Search button in the upper right-hand corner of the screen.
4. Tap the Search window to bring up the keyboard.
5. Clear the Search window if any text remains from previous searches.
6. Enter "Varaha Systems" or "uMobility" and tap **Search** in order to locate the uMobility application.
7. Tap the application listed on the screen.
8. Tap to change the icon to Install.
9. Enter the Username and Password for the App Store account associated with the iPhone.
10. Click OK.
11. The application will begin downloading once the Username and Password credentials are confirmed.
12. The user name return to the main screen – the uMobility icon will be displayed on the main screen along with a download progress. When the download is complete, the progress bar will disappear.

When an upgrade for the uMobility application becomes available, repeat these steps and if asked, confirm by clicking **Yes** to replace the application already in place on the device. This updated will occur via the Wi-Fi or cellular data network depending upon where the device is at the time of the confirmed upgrade.

Regardless of the method chosen, uMobility is now installed on the iPhone. Please proceed to the next Chapter to configure the uMobility application.

Note: the user will need to register the client with the service provider or enterprise uMC at least once after a new installation is completed before using the enterprise dialing over cellular feature. Please complete the set-up instructions in the next chapter to accomplish this requirement.




Getting Started with uMobility

Configuring uMobility

With the introduction of uMobility client software version 2.0, there are two methods for configuration of the client software after installation is completed from the steps above. The first involves an Over The Air (OTA) SMS or email message, the second is involves using the Settings screens from the device itself.



Over the Air (OTA)

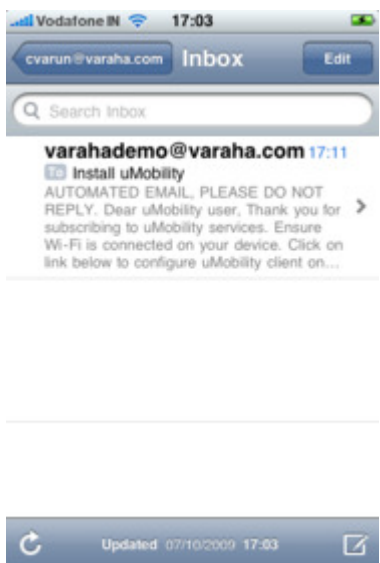

The service provider or SysAdmin will send either a SMS message or email message to the iPhone. This message will contain a link to the OTA file needed by the uMobility client to complete the configuration needed to make the software fully operational.




When the message is received, tap to read the message, then highlight and tap to select the link (URL) contained the message body.

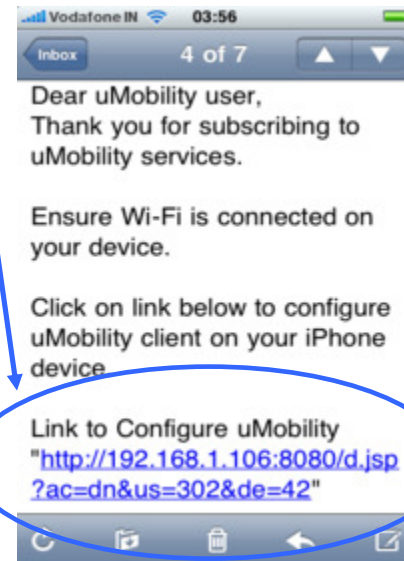

This action will cause the device to request the OTA process to begin, loading a data file that contains the user name, password and related network information needed by uMobility.




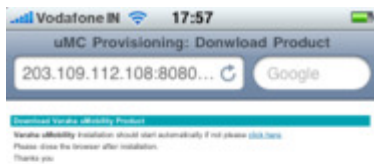

The next screen will advise the user that the configuration information has been downloaded and is now being processed by the uMobility client application.



Once the configuration processing is completed, the uMobility application will load into memory and the uMobility dialer will appear in the screen. The client will then begin the registration process (see progress messages in the upper left-hand portion of the screen). When completed, the uMobility client is ready to take and make the user's calls.

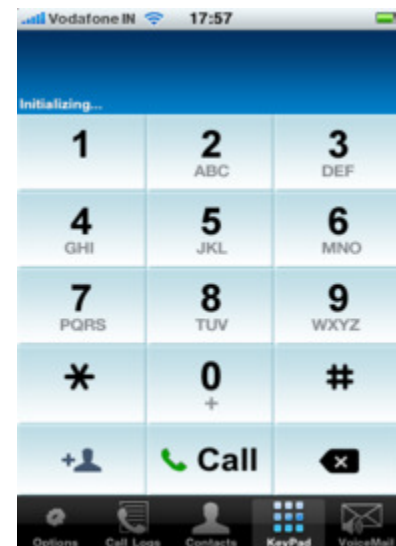




Manual Configuration



The uMobility client settings can be reached by selecting the **Settings** icon on the JumpScreen (home screen). Depending upon the user's device, the uMobility settings icon will appear at the very bottom of the available list.

Tapping on the uMobility icon from the **Settings** menu will reveal two choices as shown in the screen shot to the right.

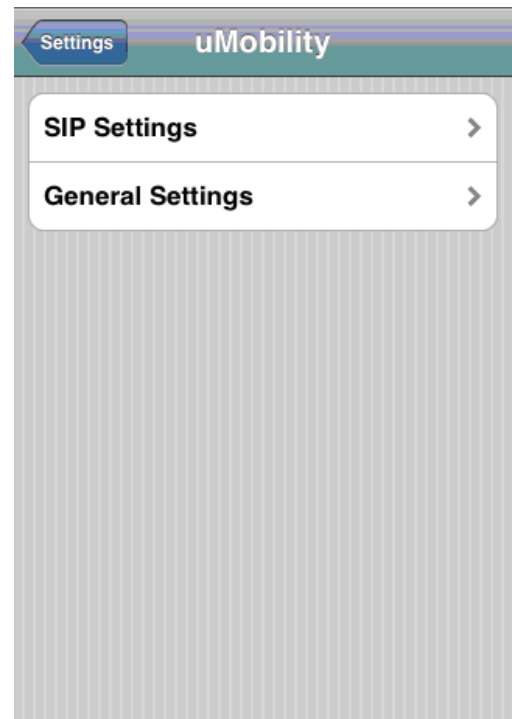




There are two types of uMobility settings: **SIP Settings** and **General Settings**

The user's service provider or system administrator will provide the information needed in the SIP Settings menu options.

Enter the provided SIP settings as demonstrated in the screenshot on the right hand side. If the server SIP port is different than the standard 5060 port number then enter the server address as "IP Address:[Port]".

User ID, Authentication Name and Password are the credentials that will be used by the iPhone's uMobility client to register with the network and provide the uMobility service. The Display Name is local to the iPhone application itself. The Server Address and Domain are references to the network location of the uMobility Controller (uMC) managed by the carrier operator or enterprise system administrator.

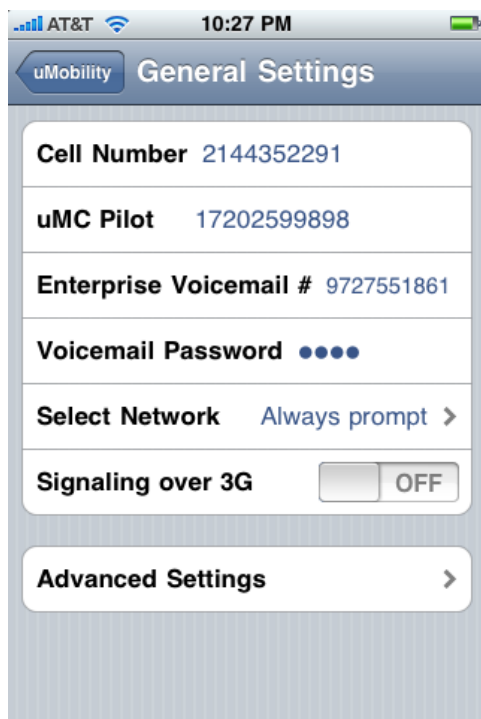

When completed, tap the uMobility icon in the upper left-hand side of the screen to return to the previous menu.

Next, tap **General Settings**. The information requested in the General Settings tab should be entered as demonstrated in screenshot to the left.


Cell Number should be entered without '+' and is the cell phone number of the iPhone device (Note – no entry for the iPod Touch is needed here as this device does not have cellular network capabilities). The uMC Pilot number is the phone number of the uMobility Controller run by the network operator. The Enterprise Voicemail # and Voicemail Password are the codes needed to enter and maintain the user's voice mailbox.

The Select Network provides three options for the behavior of the application:



- Always prompt – every time a phone number is dialed, uMobility will ask whether to use the uMobility or the cell phone personality (CNAM, CLID)
- uMobility – each and every call placed from the iPhone will use the uMobility calling name (CNAM) and line ID (CLID)
- Cellular – each and every call placed from the iPhone will use the cellular calling name and line ID.

Signaling over 3G allows the iPhone to use the data channel of the iPhone's cellular service plan to send and receive signaling information related to the service. The most notable user experience while this setting is turned **On** will be visibility to voice mail messages in the Enterprise voice mail system even though the device is not connected to a Wi-Fi network.

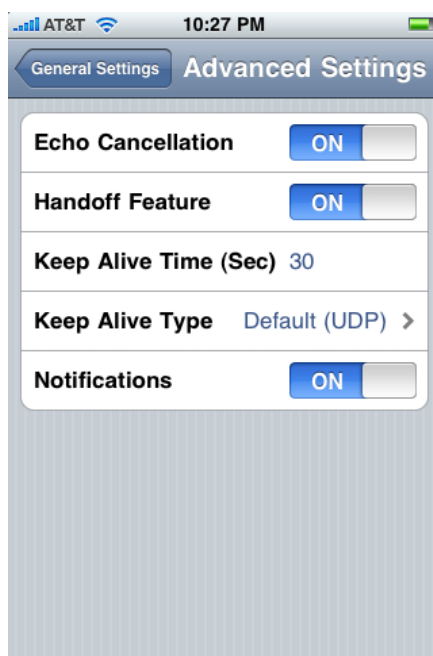

Advanced Settings – Tapping **Advanced Settings** will provide the user with another menu layer that provides for a number of additional options in configuring the uMobility application.

Echo Cancellation – The iPhone's cellular application contains an ability to cancel out echo that is introduced while talking on the phone. This echo is created by the speaker while playing sounds (e.g., voice conversation), which in turn causes the glass to vibrate on the touch screen. This combination of events occurs when on a Wi-Fi call as well, but the native echo cancellation capabilities are not available during a Wi-Fi based service. Therefore, Varaha Systems has added echo cancellation capabilities to the uMobility client. When this capability is turned **On**, the uMobility client will clean up the echo


introduced by the device (a combination of acoustic and hybrid echo) will provide a much clearer voice conversation to be enjoyed by those on the active call.

Handoff Feature – This allows the user to turn **On** or **Off** the clients ability to communicate with the uMobility Controller to invoke a handoff. If this feature is turned on, the handoff feature will work as needed depending upon network conditions. If this feature is turned off, the network that is used to start a phone conversation will remain in force during the entire conversation, regardless of network conditions.

Keep Alive Time (Sec) – This setting should only be changed under the advice of a SysAdmin or the service provider. This setting determines how often a keep alive



message is sent to the uMC. Keep Alive messages are used in IP communications to maintain communications contact between two network elements.

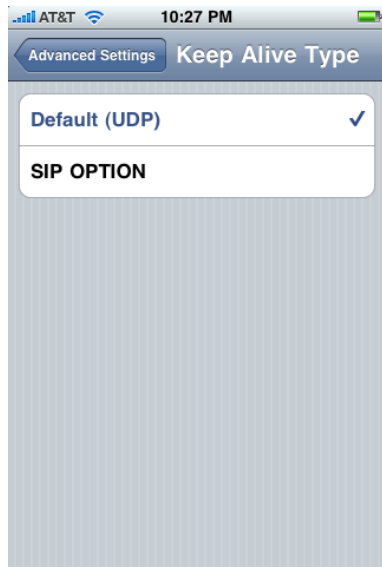


Keep Alive Type - The default of this setting is UDP (User Data Packet). The alternative is SIP OPTION. This setting should not be changed by the user unless instructed to by the SysAdmin or the service provider. This setting determines what type of protocol is used by the client to communicate Keep Alive messages to the uMC.

Notifications – This setting works in conjunction with the Handoff feature, determining whether the user will received APNS (Apple Push Notification Service) messages before or after a network handoff. **On** means APNS messages will be received by the client and displayed on the screen for the user's action. **Off** means APNS notifications will not be sent to the client. Please note – if Notifications are turned off but the handoff feature is turned on, handoffs will occur as determined by

the current network conditions, but the APNS notifications will not be displayed and since the uMobility client will not be in the foreground, subsequent handoffs will not occur.


Getting to Know the uMobility Client Application

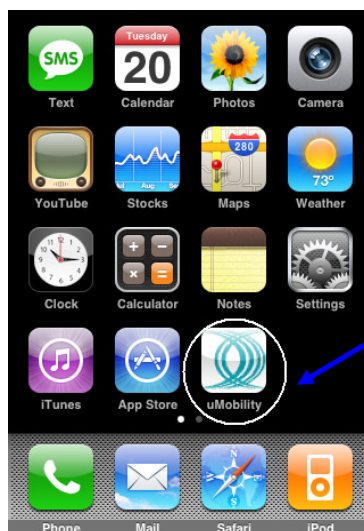

To access the uMobility application, go to the device's JumpScreen. Selecting the uMobility icon will launch the application.



Once the application has completed launching, the following screen will appear.

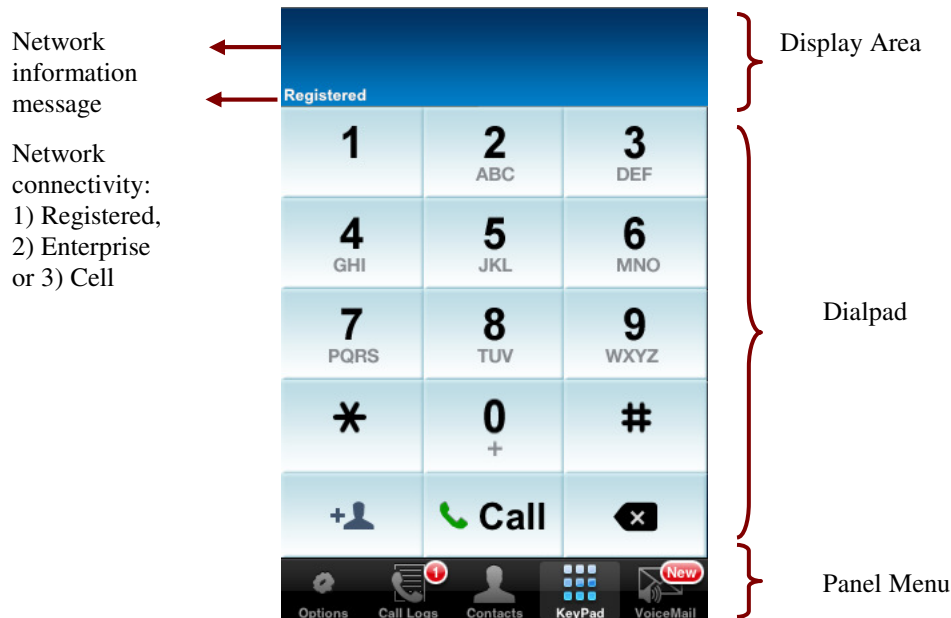

Each of the application areas are described below:


- Display Area – used by uMobility to provide information about the network connection status of the iPhone
- Network Connectivity Area – relates information on the network that could be used by the application when the next phone call is placed on the device.



Registered means uMobility has found a Wi-Fi zone or if turned on a cellular data connection and has used that interface to register back to the network provider or enterprise. Depending upon the installation, the uMobility phone number will display along with the **Registered** notification.




Enterprise means that a cellular data network has been found and is being used to register the uMobility client with the network provider. Depending upon the installation, the uMobility phone number will display along with the **Enterprise** notification.

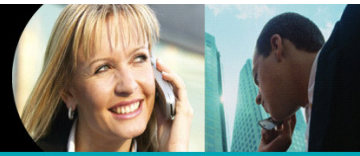


Cell lets the user know that no data network is available (Wi-Fi or 3G) and that calls will be placed exclusively using the cellular network. Note – this message will

not appear when using the iPod Touch.

- Dial Pad – 10-digit keypad to enter in phone numbers or interact with IVR and ACD requests (e.g., calling in to a conference service and being asked to enter the meeting ID).
- Panel Menu – choices available to the user for additional functionality.



The following section will outline the features provided by the choices housed in the Panel menu above.

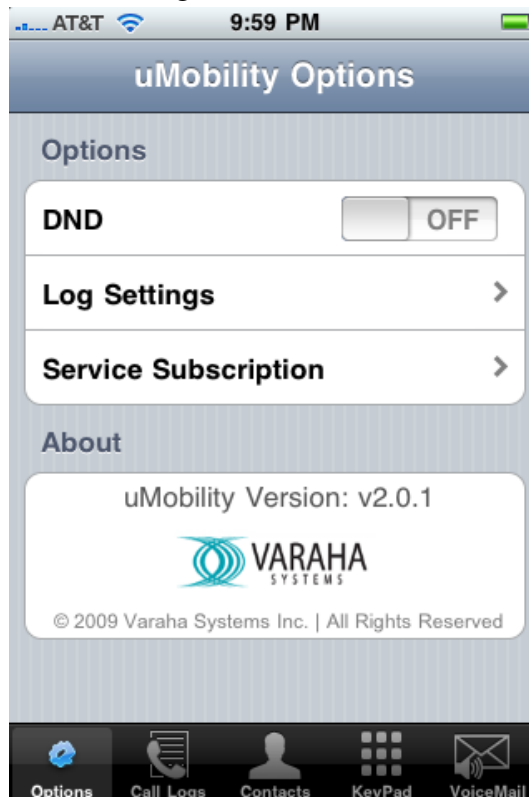

The left-most selection (**Options**) takes the user to the uMobility **Options** menu (see the left here). There are three areas of interest on this menu (uMobility Options).

The first is **DND** (Do Not Disturb). When turned OFF, DND takes no action. When turned ON, DND will instruct the uMC that the user does not wish to be disturbed and all inbound calls to the user's uMobility number will be sent to the enterprise voicemail system.

Log Settings are further described in the Advanced section of this User Guide.

The **Service Subscription** provides the user with the ability to manage their monthly subscription to the uMobility service.



Call Logs displays a list of All or Missed call activity. This list can be cleared by press the Clear button in the upper right-hand corner of the menu. Note that only dialed and received numbers from the uMobility application will be shown in this list.

Contacts takes the user to the Contacts list on the iPhone. **Keypad** brings the KeyPad back to the main screen. Pressing **Voicemail** automatically dials out to the preprogrammed voice mailbox of the iPhone. If a new voicemail indication is received from the uMC then this is displayed with an icon




- **Network Error Message** – If the uMobility client encounters a network problem while registering with the network presently available, any descriptive error



messages will be briefly displayed in this area. As soon as the host network or user resolves the issue, the error message will be removed.

Making a Call With uMobility

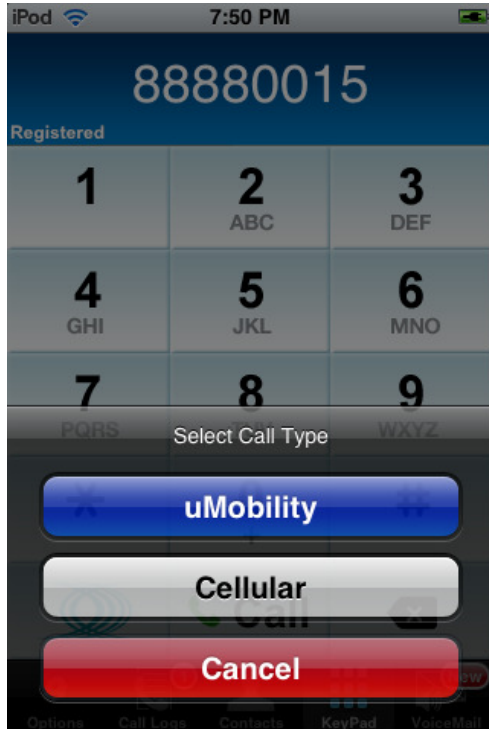


In order to originate a call, the user needs to dial the desired number using the keypad and then click on the Call Button. In the case where the 'Always Prompt' option has been selected, the user will next be presented with an option of routing the call via the **uMobility** personality or the **Cellular** personality.

Once the personality is selected (either by configuration or menu choice as in the example above), the call request is placed with the provider's network (communicating with the uMC). At that time the uMobility client screen is changed to the one on the right-hand side, noting the phone number called and text below highlighting the call's progress (in the picture case, "Calling"). Tapping the red **End Call** button at the bottom of the screen will end the current call, whether in process (e.g., set-up) or progress (e.g., connected).



In Call Options

Once a call has been connected (inbound or outbound), the in-call menu allows the user to engage a number of in call options, such put the call on mute/hold/activate loudspeaker

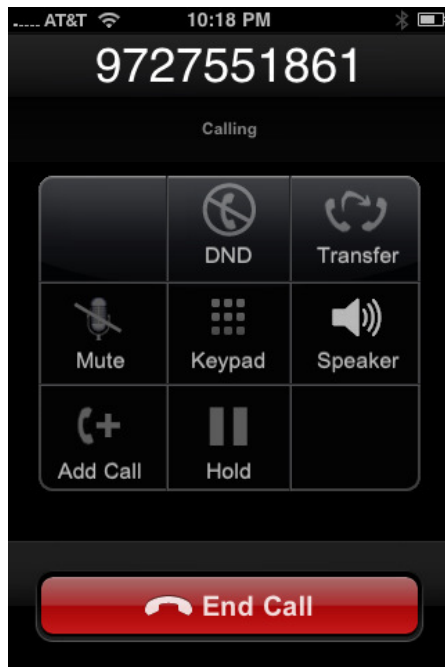

or access keypad for sending DTMF. The user can also access the volume hard keys or silence ringer of the phone. Each button works as an on/off switch for the particular feature. Tapping once engages the feature (e.g., puts the call on **Mute**); tapping again **unMutes** the call.

The following identifies each in call option and gives a brief description on its operation. Please note that specific functions of some of these in call capabilities are dependent upon the type of call manger engaged.

DND – Do Not Disturb will tell the uMC to send all incoming calls to the enterprise voicemail system.

Transfer – this allows the user to transfer an active call to a third party. This in call capability can be used for blind/direct transfers (no announcement

from the called party).

Mute – this key mutes the call, turning off the device's microphone until it is deactivated by tapping.

Keypad – this selection brings up the 10-digit keypad for the user.

Speaker – tapping the Speaker button turns on and off the device's speakerphone. Note – when using this feature it is strongly encouraged that Echo Cancellation be turned On (see **Settings ->General Settings -> uMobility ->General Settings** to engage this feature).

Add Call - tapping this selection allows the user to put the first call on Hold, bringing up the uMobility dialer to make a 2nd call (Note – if the user has selected Always Ask in the uMobility settings, Add Call will still default to the uMobility dialer for the second call). Engaging this feature brings up a new in call capability, Swap (allowing the user to move from the first call to the second and back again). Swap can be used as many times as necessary to accomplish the objective. See Advanced Options for more information on




this feature's operation.

Hold – tapping this selection allows the user to place the call on hold so that another action can be taken (e.g., placing a 2nd call to consult with another party, then return to the first call to address the issue). See Add Call for additional information.

Note that for calls placed using an available Wi-Fi network will receive the in-call menu from the uMobility client. If the call is placed or was received via the cellular network, the in-call menu will be provided and handled by the default phone application on the iPhone.

When receiving a call on the uMobility client while registered in a Wi-Fi network, the following screen is presented:

Any of the In Call options mentioned in the previous section become available to the user after the call is answered.

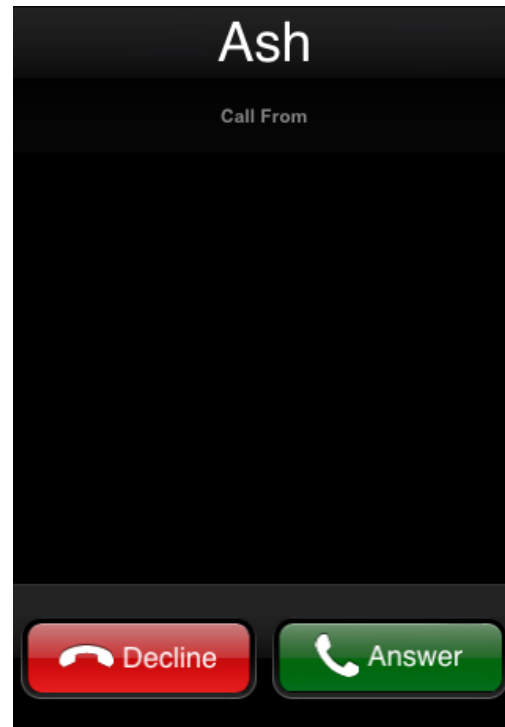

Receiving a Call
With uMobility

Moving Calls Between Networks (Handoff)

With Version 2.0 of the uMobility client for iPhone, the solution has the ability to move calls from Wi-Fi to cellular networks as well as from cellular to Wi-Fi networks. This section will describe each of these unique activities along with screen shots experienced during the process to give the user an understanding of this functionality.



Wi-Fi to Cellular to Wi-Fi



In our example, the uMobility user has registered the client through a Wi-Fi network and is presently on an active call with the wife. Since the client is in an active call, the in call options menu appears on the screen (9-square displayed).

If the uMobility solution determines for whatever reason that the Wi-Fi network's performance is no longer sufficient to support the call (e.g., the user is leaving the building and the resulting call quality begins to suffer), uMobility will have created a "make before break" call to the cell phone number of the uMobility enabled device. The result of this behind-the-scenes activity is an inbound call that appears on the iPhone's screen. An example screen shot is provided here. The user may press the **Answer** button provided to move the call from the Wi-Fi network over to the cellular network. NOTE – if the user presses the **Decline** button at this time, the call will remain on the Wi-Fi network, the uMobility client application will reappear and the uMobility service will attempt to use the Wi-Fi network for as long as possible given network conditions. Also note that is the user **Declines** the inbound call, but remains in the active call, uMobility may try again to move the call over to the cellular network as described.

Because of the way the iPhone's operating system is architected, this inbound call is presented to the user via the native dialer of the iPhone. In order to conveniently get the uMobility client back to the foreground (on-screen so the user can engage the in call features of uMobility), the uMobility solution uses a new feature available in the 3.0 version of the Apple OS (Operating System) called APNS (Apple Push Notification Service).

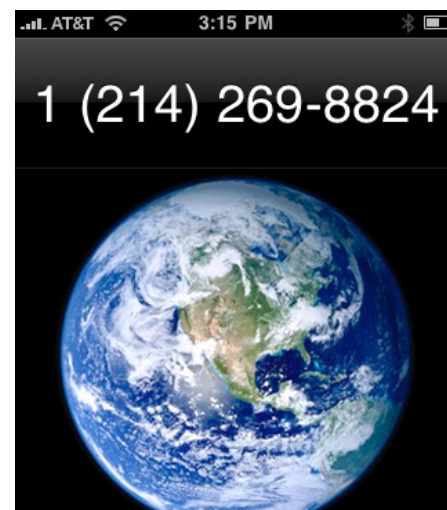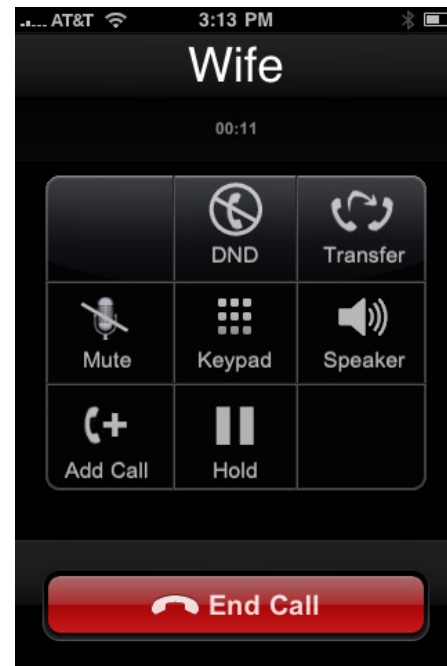




The user's uMobility device will receive a message from the in-network APNS server, which will allow the user an easy way to bring the uMobility application back into the foreground (i.e., on-screen).

Selecting uMobility from the pop-up will bring the uMobility client back into the foreground while the call remains (at the moment) on the cellular network, under the control of the native dialer.

If the user selects **Close**, the call will remain under the control of the native dialer and only those in call features will be available for the duration of the active call.

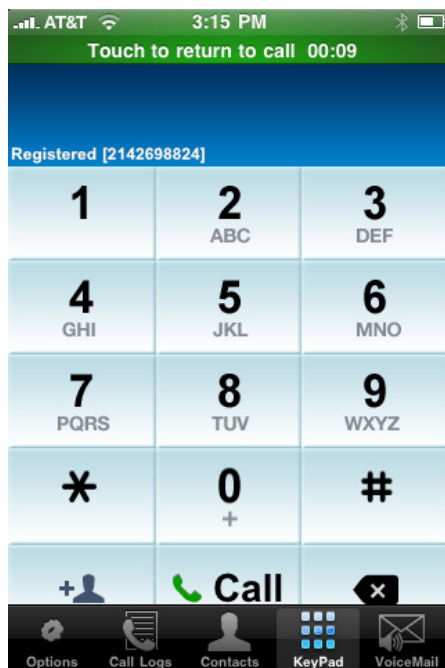


Upon tapping uMobility, the screen changes into the one of the immediate left, which is the uMobility client with a new green status and information bar on top. If the user desires to return the call's interface control back to the native dialer, tapping anywhere on the green bar will remove the uMobility client and return the native iPhone dialer to the foreground.

With the uMobility client now in the foreground, the reader will notice that the screen shot example shows the uMobility client is Registered. This means the client has found a valid Wi-Fi network, has received an IP address and has communicated back to the network-based uMC of its present location and situation. The uMC will then work with the client to see if the Wi-Fi network's performance is sufficient to provide voice grade quality of service and allow the active call to be moved from the cellular network

to the available Wi-Fi network.

If the Wi-Fi network is determined to be able to support the active call with a sufficient quality of service, the green bar disappears and the entire uMobility client application screen returns to the foreground. The reader will notice that the call timer (top center of the screen right under the called party's name) has returned and starts counting from 00:00. This occurs because this Wi-Fi-based call is

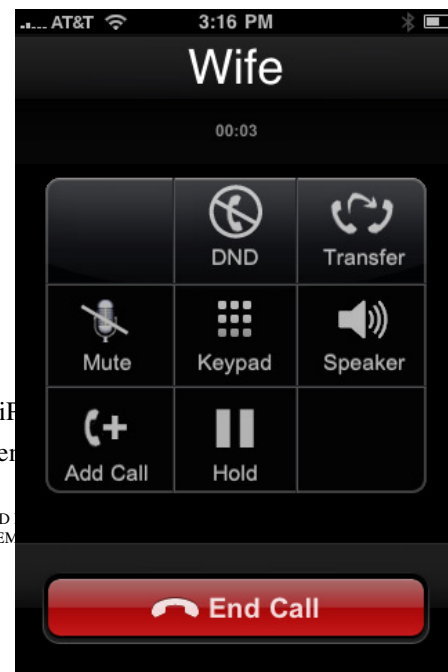

Title: uMobility User's Guide – Apple iPhone™ and iPod Touch™

Confidential


© 2003-2009 Varaha Systems




a new call, having been handed the connection from the cellular network. As a new call, the timer beings afresh for the user's information.

Cellular to Wi-Fi

When a uMobility call is placed while in a cellular network, the native cellular dialer is called up and used to place the call. If, however, the uMobility user moves within range of a qualified Wi-Fi network, the APNS message will once again grace the screen.

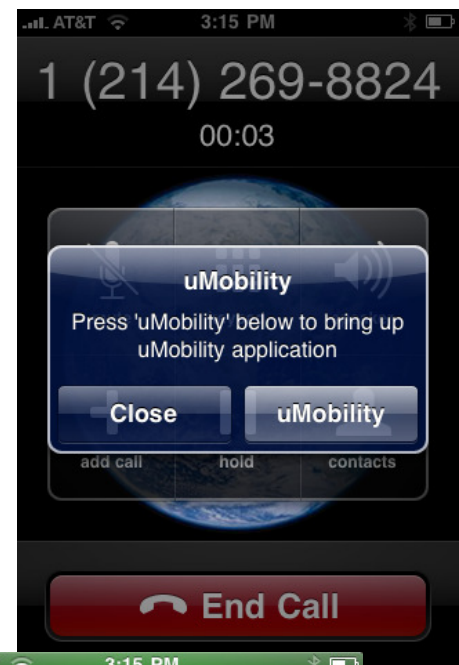


The user taps the uMobility button to bring the uMobility application into the foreground of the device. Once that is accomplished, the uMobility dial pad appears, along with a green information ribbon across the top of the screen (see screen shot on the right). If the user touches this green ribbon, the native dialer will return to the foreground and allow the user to end the call if desired.

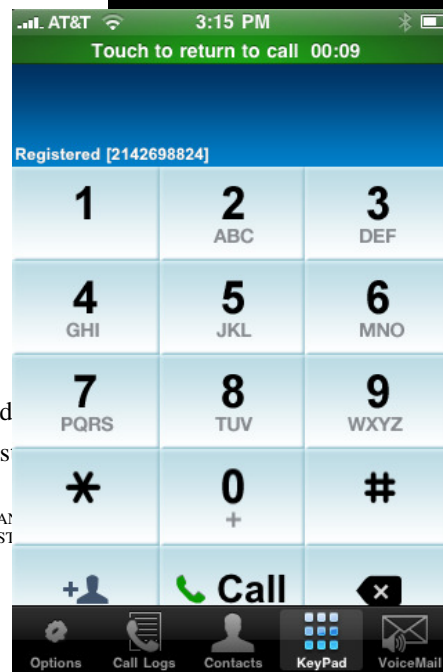

Title: uMobility User's Guide – Apple iPhone™ and
Confidential © 2003-2009 Varaha Sys



If no action is taken, the user will be able to watch the registration process come to conclusion (Registered). At that time, the uMobility client will test the Wi-Fi network for its readiness for voice communications. If the communication between the client and the uMobility Controller in the network agree, the call will be moved over to the Wi-Fi network (see screen shot below).

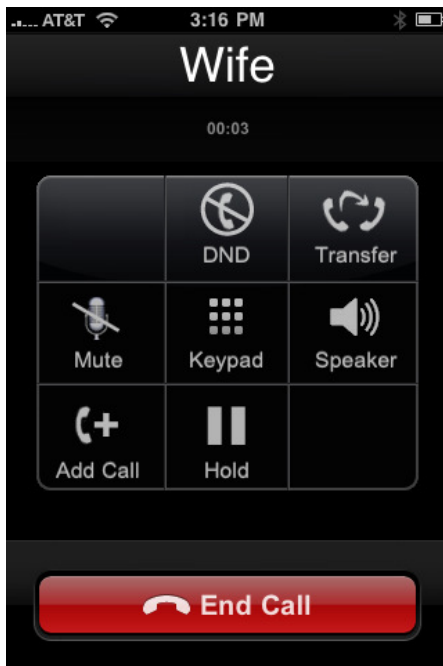




Advanced Options With uMobility


Transfer a Call With uMobility

The uMobility client application provides the user with the ability to transfer a call to another number. This section outlines the steps necessary to engage this feature.

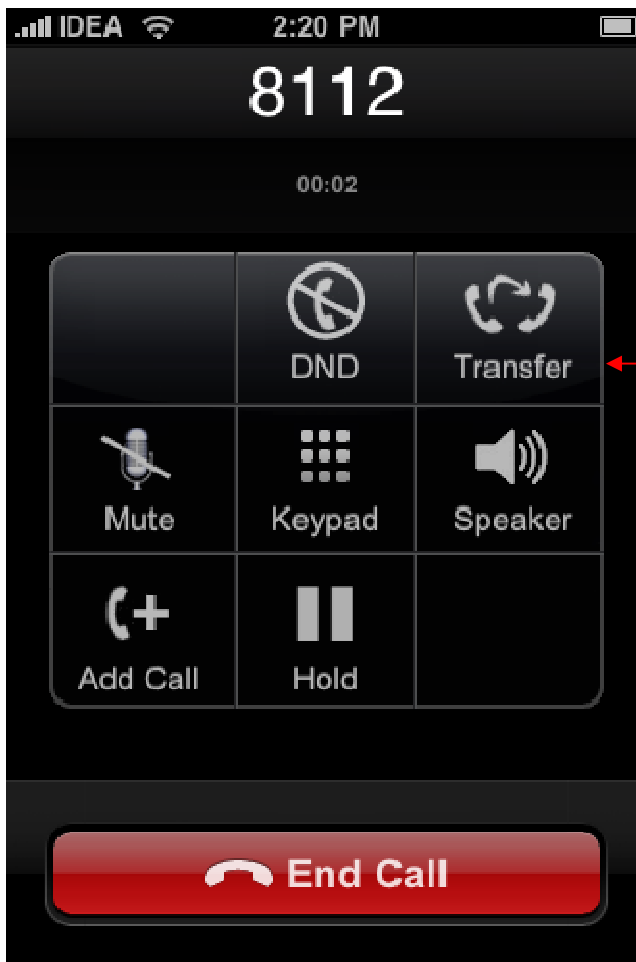

Once a call has been connected (either inbound or outbound), the in-call menu allows the user to transfer an active call to a third party of the user's choosing. Tapping the Transfer icon provides the user with the screen to transfer the call (see screen shot on the next page).


Press Transfer

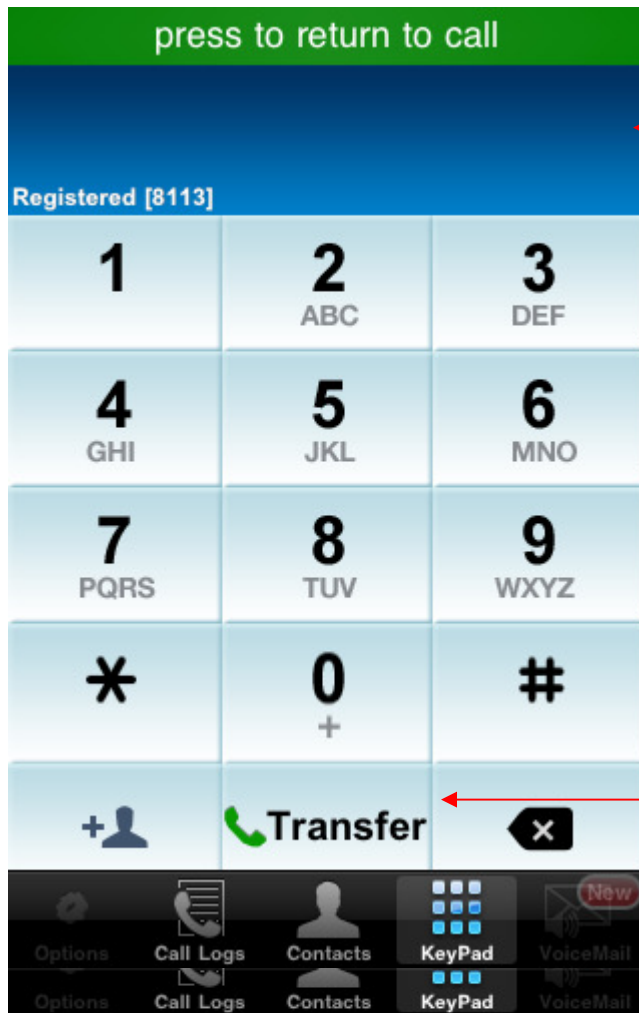

Dial the third party number

The uMobility user now has the Transfer screen displayed on the device. From this screen, the user can now dial the desired third party number to which to transfer the call. To engage the outbound dialing, the user then taps the Transfer icon.

Press Transfer to dial

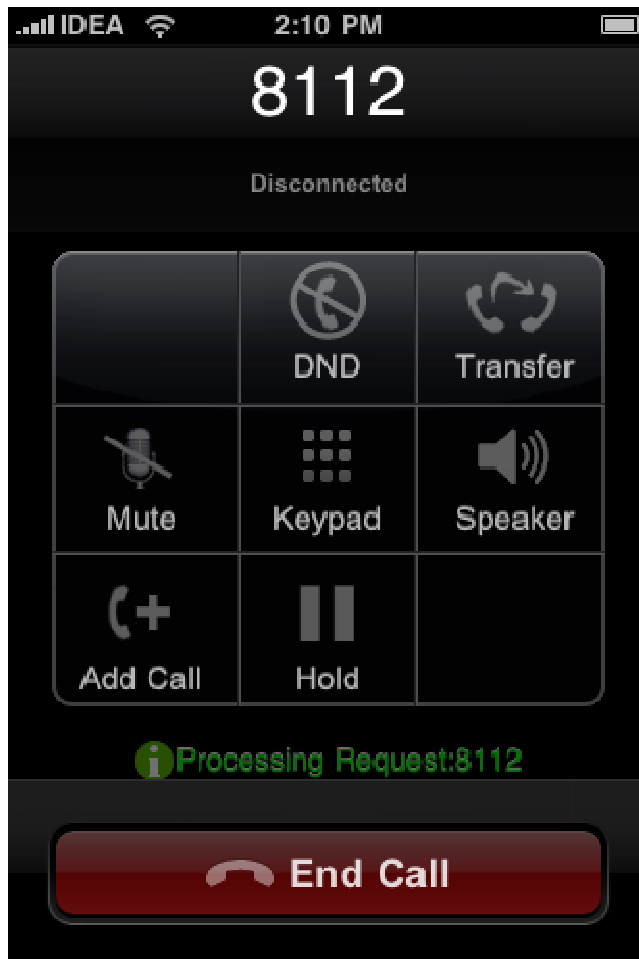


After the user taps the Transfer icon, the screen changes the one to the immediate left, notifying the user that the transfer request is being processed.

Processing Request is displayed




When Transfer is done, the first user will be disconnected.

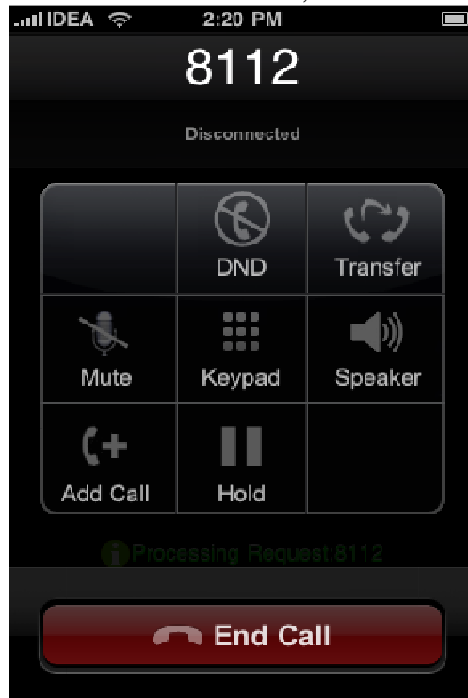

Call Disconnected is displayed after the Transfer is completed

Upon completion, the uMobility dial pad is returned to the screen and the call has been transferred to its desired destination.

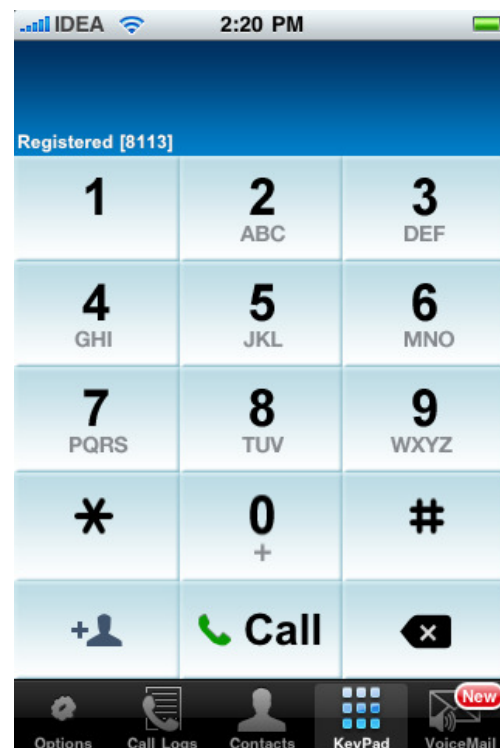




Add Call With uMobility

Once a call has been connected (inbound or outbound), the in-call menu allows the user to Add Call.


Tap the Add Call icon will display the menu screen that allows the user to add another call, engaging two separate conversations with the same device.

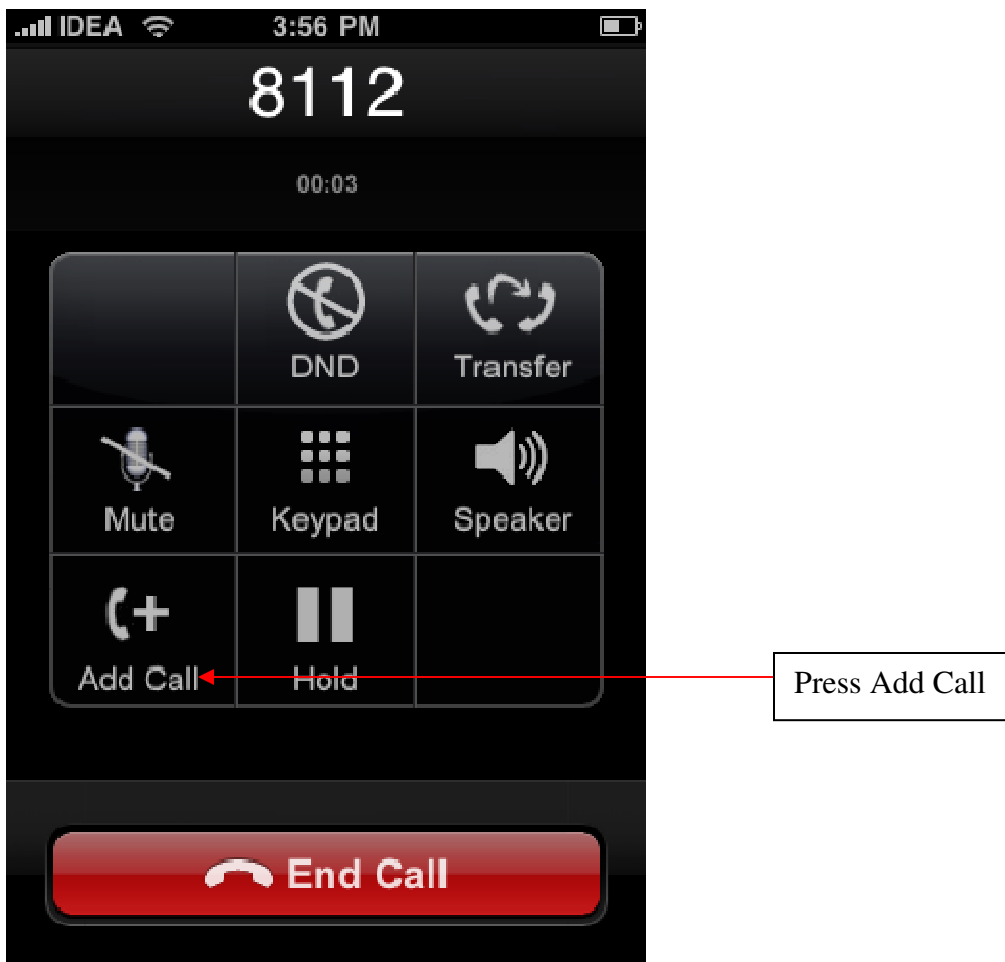




From this screen, the user is able to enter in the dialed digits of the additional called party that the user wishes to call.


The user taps the key pad to enter in the phone number of the desired party.

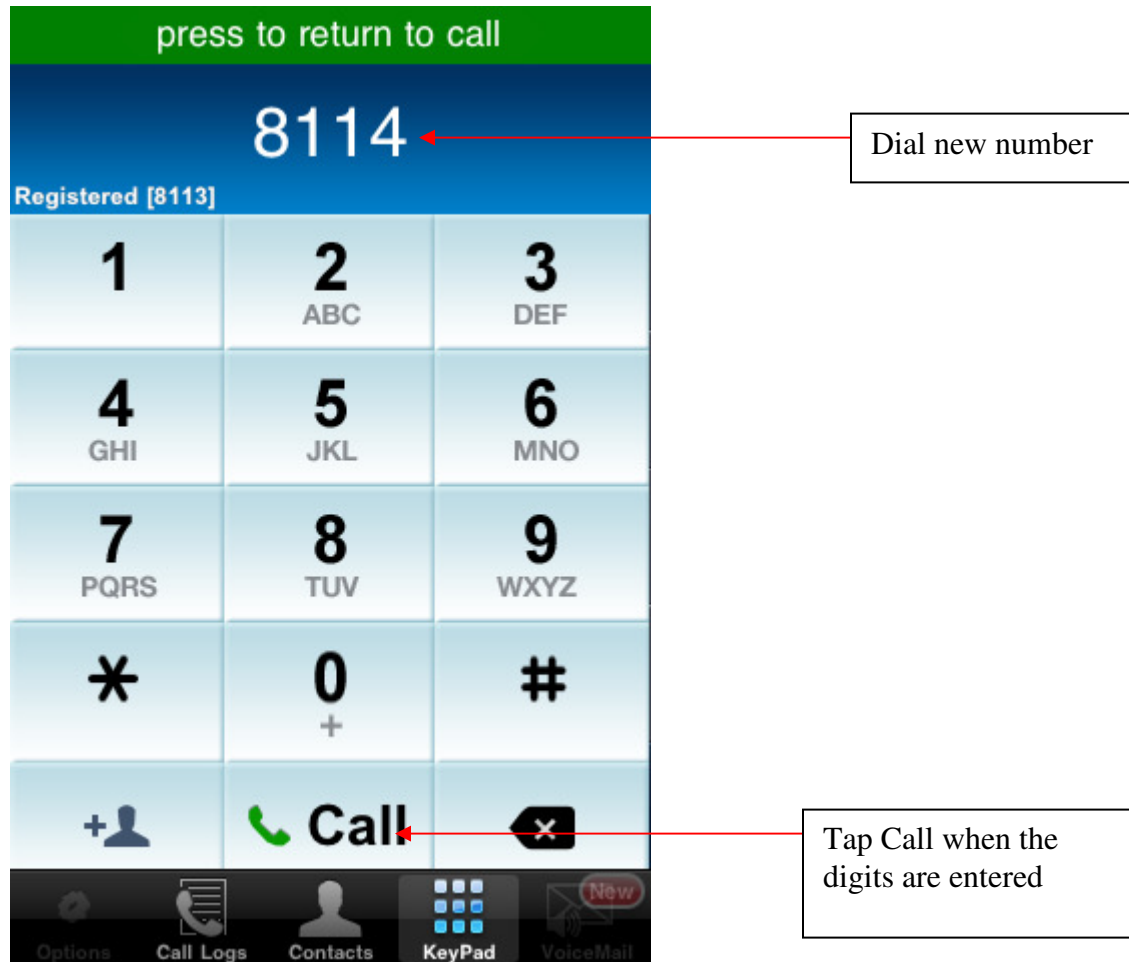




The screen updates, showing the user the message icon **Calling** which is displayed in the upper right-hand corner. The first active called party is placed on Hold (see screen shot below).

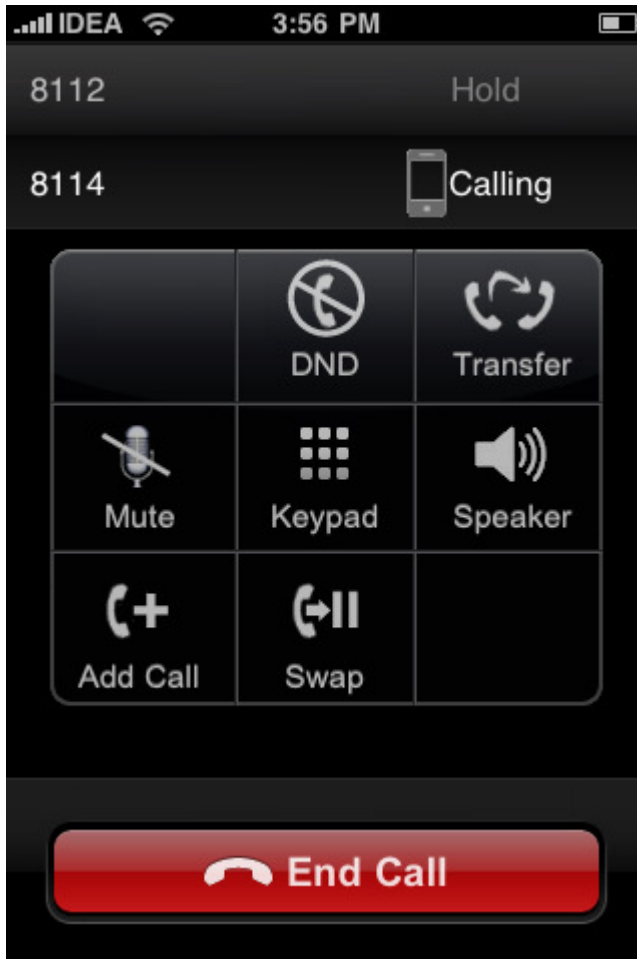

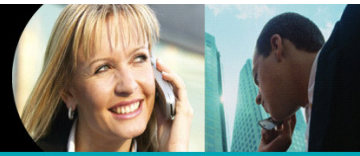

The requested call to Added Call number is completed. Both calls are active, the first on Hold, the second active (hence the counter increments the passing seconds as reflected in the screen shot below). To connect to the previous user tap **Swap**.

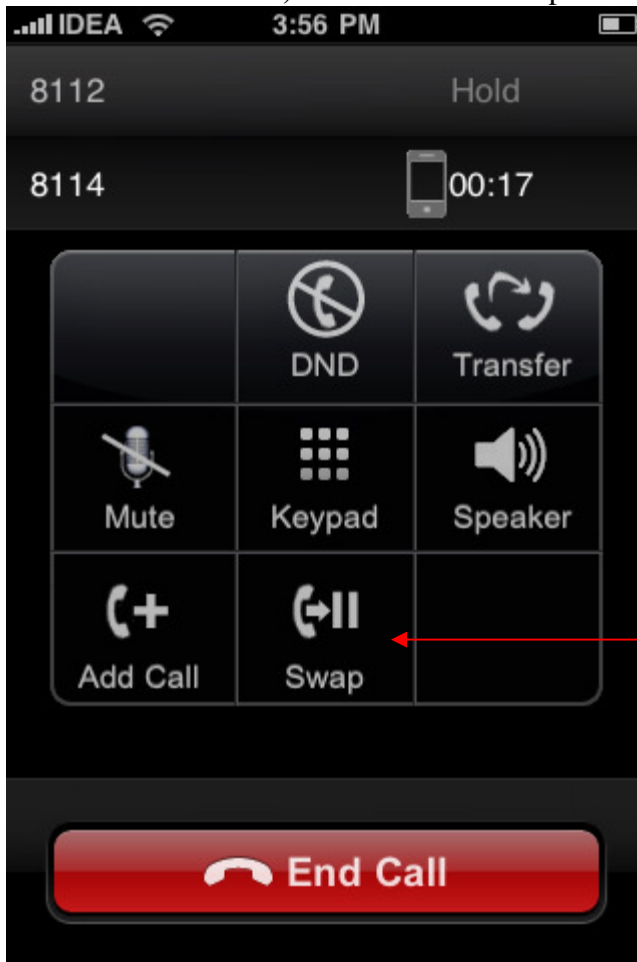


Press Swap



The line is now connected to the previous user and the second user is placed on Hold. The top of menu displayed on the device is updated to reflect the current status of each call, as identified by the number of the party (in the screen shot below, extension 8112 and 8114 are both represented by active calls).

To talk to the second user press Swap.

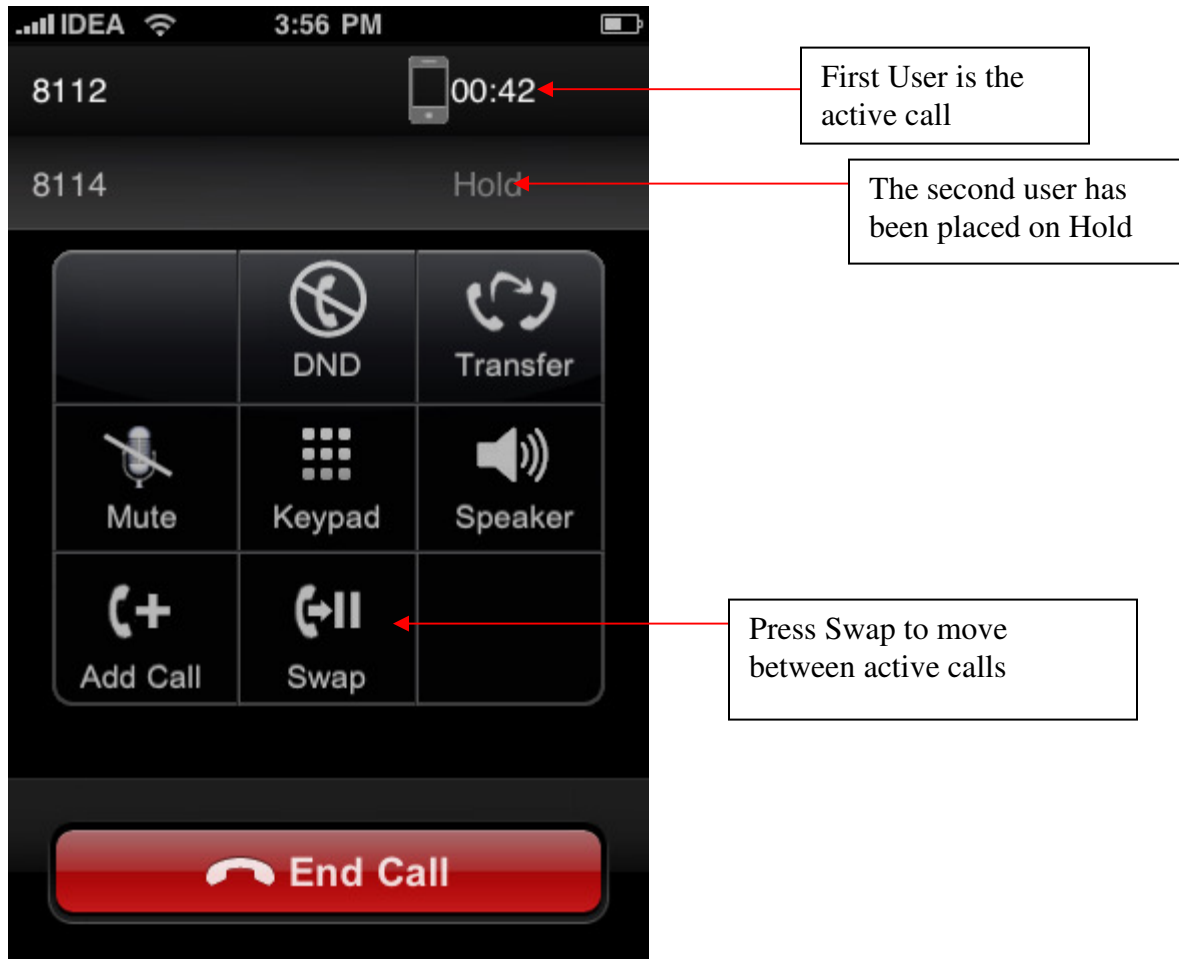



Uninstalling uMobility

To uninstall uMobility from the iPhone, complete the following steps:

1. Press the **Home** button to return to the main screen.
2. Scroll through the main menu pages until the uMobility icon is seen.
3. **Tap** and **Hold** the uMobility icon until it starts to quiver.
4. **Tap** the red **X** on the upper left-hand side of the uMobility icon.
5. Select **Yes** to confirm the deletion of the application.

To uninstall uMobility from the computer through iTunes (PC or Mac), complete the following steps:

1. Launch iTunes
2. Plug the iPhone into the computer
3. Once iTunes recognizes the iPhone, select the iPhone from the menu list on the left-hand side of the screen
4. **Click** on the **Applications** tab
5. **Left click** on the uMobility application
6. **Scroll** to **delete** and **click** to select
7. Confirm the deletion of the uMobility application
8. **Click** on the **Summary** tab to return to the main report on the attached iPhone
9. **Click** on **Sync** in the lower right-hand side of the screen.
10. The application will be removed from the iPhone when the sync process completes.



Limitations With uMobility

The uMobility load v2.0 has known limitations as outlined below. Varaha's roadmap for continuing releases will deal with many of these issues, which will be tracked using the Release Notes for this client.

- For enterprise calls (uMobility calls over cellular network) the client cannot have * or # in the dialed enterprise number string


Known Issues

- Favorites dial list is not presently supported
- The iPhone limitation of allowing multitasking for third party applications will cause the uMobility client to exit when there is an incoming cellular call or a user action to start another application.
- Personal ringtone is not supported. Also default phone ringtone is not presently supported.
- Bluetooth headsets are supported when the uMobility client is operating in the cellular network only.
- Known iPhone issue
(<http://discussions.apple.com/thread.jspa?threadID=1848644&tstart=0>)
 - Inserting wired headphone into the iPhone phone may sometimes cause the uMobility client to exit and start the iPod application, playing a random song.
- The iPhone uses Alert messages to let the user know about various network events (e.g., incoming SMS message) and device events (e.g., low battery condition). Please refer to the Application Note: Apple iPhone Alert Call Behavior for more information on the calling and called party user experience with these events.



Log Settings

Log Settings allows the uMobility client software to collect information about the network, user actions, network responses and the like. These logs are collected on the device and can then be forwarded by the client to the FTP (File Transfer Protocol) server of the user's enterprise or service provider's choosing. These logs are used in assisting the technical support staff in troubleshooting issues with the service or software. This section of the uMobility client should not be used unless instructed to do so by the technical support staff.

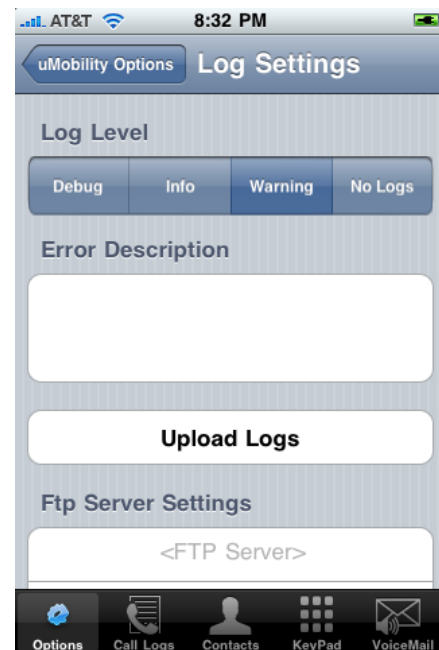

Configuring iPhone to Work with a Wi-Fi Network

The iPhone is predisposed to work with any available Wi-Fi network that it can find. This section will quickly review the available options. For more information, please consult the iPhone User's Guide provided with the iPhone.

Select the **Settings** icon from the home screen on the iPhone. The next screen that appears will offer up all of the general settings categories for the device. Tapping **Wi-Fi** opens up the Wi-Fi Networks settings menu. This menu allows the user to see all available information for the currently available Wi-Fi network by tapping on the entries under Choose a Network...



Appendix A – End User License Agreement

Varaha Software License Agreement

IMPORTANT. PLEASE READ THIS AGREEMENT CAREFULLY BEFORE USING THE PROGRAM. VARAHA SYSTEMS WILL ONLY LICENSE THE PROGRAM TO YOU IF YOU FIRST ACCEPT THE TERMS OF THIS AGREEMENT.

This End-User License Agreement ("EULA") is a legal agreement between you (either an individual or a single entity) and Varaha Systems, Inc. for the software product identified above, which includes computer software and may include associated media, printed materials, and "online" or electronic documentation ("SOFTWARE PRODUCT"). By installing, copying, or otherwise using the SOFTWARE PRODUCT, you agree and are bound by the terms of this EULA. If you do not agree to the terms of this EULA, you may not install or use the SOFTWARE PRODUCT.

AGREEMENT TO CONTRACT ELECTRONICALLY: You (the "Licensee") and Varaha Systems agree to contract electronically. This means that when you choose the "I Accept", "Yes", or "Next" option on the device or computer user interface, you acknowledge the agreement to these terms and conditions and that they are doing so with the intent to "sign" a contract with Varaha Systems electronically.

GRANT OF LICENSE. This EULA grants you the following rights:

DEFINITIONS.

"SOFTWARE PRODUCT" means (a) all of the contents of the files, disk(s), CD-ROM(s) or other media with which this Agreement is provided, including but not limited to (i) Varaha Systems or third party computer information or software; and (ii) related explanatory written materials or files ("Documentation"); and (b) upgrades, modified versions, updates, additions, and copies of the SOFTWARE PRODUCT, if any, licensed to you by Varaha Systems (collectively, "Updates").

"Use" or "Using" means to access, install, download, copy or otherwise benefit from using the functionality of the SOFTWARE PRODUCT in accordance with the Documentation.

"Permitted Number" means one (1) unless otherwise indicated under a valid license (e.g., volume license) granted by Varaha Systems.

"Computer" means an electronic device that accepts information in digital or similar form and manipulates it for a specific result based on a sequence of instructions.

"Varaha Systems" means Varaha Systems, Inc., 2650, Valley View Ln. Bldg 1, Suite 200, Dallas, TX 75234

SOFTWARE LICENSE

As long as you comply with the terms of this End User License Agreement (the "Agreement"), Varaha Systems grants to you a non-exclusive license to Use the SOFTWARE PRODUCT for the purposes described in the Documentation.

a. General Use. You may install and use a copy of the SOFTWARE PRODUCT on the compatible device or compatible computer.

b. Server Use. You may use the SOFTWARE PRODUCT on a network, provided that you have a licensed copy of the SOFTWARE PRODUCT for each user that uses the SOFTWARE PRODUCT. No other network use is permitted, including but not limited to, using the SOFTWARE PRODUCT either directly or through commands, data or instructions from or to a computer not part of the internal network, for internet or web hosting services or by any user not licensed to use this copy of the SOFTWARE PRODUCT through a valid license from Varaha Systems.

c. Backup Copy. You may make one backup copy of the SOFTWARE PRODUCT, provided the backup copy is not

Title: uMobility User's Guide – Apple iPhone™ and iPod Touch™ 2.0.1

Confidential

© 2003-2009 Varaha Systems, Inc.

Page 35 of 39



installed or used on any computer. You may not transfer the rights to a backup copy unless you transfer all rights in the SOFTWARE PRODUCT as provided under Section 2(e).

d. Electronic Documents. Solely with respect to electronic documents included with the SOFTWARE PRODUCT, you may make an unlimited number of copies (either in hardcopy or electronic form), provided that such copies shall be used subject to the restrictions of this EULA, and are not republished or distributed to any third party.

e. The SOFTWARE PRODUCT is licensed, not sold.

Note: If the SOFTWARE PRODUCT has been either marked as an evaluation copy or provided to you and identified by Varaha Systems as an evaluation copy, you are then granted a non-exclusive license to use and evaluate the evaluation copy within the organization free of charge for thirty (30) days from the first installation or download from our website, unless more time is authorized in writing by Varaha Systems.

RESTRICTIONS.

a. No Reverse Engineering, Decompilation, or Disassembly. You may not reverse engineer, decompile, modify, disassemble, translate or attempt to discover the source code or data structures of the SOFTWARE PRODUCT, in whole or in part, except and only to the extent that such activity is expressly permitted by applicable law notwithstanding this limitation.

b. Confidential Information. You may use any portion of the SOFTWARE PRODUCT Varaha Systems provides, verbally or in writing (for example, "Confidential " only to use the products and resolve problems related to the use of the SOFTWARE PRODUCT for trial and use.

c. Components. The SOFTWARE PRODUCT is licensed as a single product. Its component parts may not be separated for use on more than one computer.

d. Rental. You may not rent, lease, lend, or sublicense the SOFTWARE PRODUCT or permit it to be used on a service bureau basis.

e. Support Services. Varaha Systems may provide you with support services related to the SOFTWARE PRODUCT ("Support Services"). Use of Support Services is governed by Varaha Systems policies and programs described in the user manual, in "online" documentation, and/or in other Varaha Systems-provided materials. Any supplemental software code provided to you as part of the Support Services shall be considered part of the SOFTWARE PRODUCT and subject to the terms and conditions of this EULA. With respect to technical information you provide to Varaha Systems as part of the Support Services, Varaha Systems may use such information for its business purposes, including for product support and development. Varaha Systems will not utilize such technical information in a form that personally identifies you.

f. For evaluation copies, you are not entitled to any enhancement or update to the SOFTWARE PRODUCT. For evaluation copies, Varaha Systems shall have no obligation to provide maintenance or support for the SOFTWARE PRODUCT.

g. Permitted Transfer. You may permanently transfer all of the rights under this EULA, provided you retain no copies, you transfer all of the SOFTWARE PRODUCT (including all component parts, the media and printed materials, any upgrades, this EULA, and, if applicable, the Certificate of Authenticity), and the recipient agrees to the terms of this EULA. A SOFTWARE PRODUCT which Varaha Systems licenses in multiples of two or more (for example, as a pack) may only be transferred in its entirety. In this case, individual licenses may not be transferred.

h. Termination. Without prejudice to any other rights, Varaha Systems may terminate the license if you fail to comply with its terms and conditions of this EULA. In such event, you must destroy all copies of the SOFTWARE PRODUCT and all of its component parts.

i. Neither party may bring a legal action under this Agreement more than two years after the cause of action arose.

j. The use of SOFTWARE PRODUCT is permitted as per the US or local export and licensing laws and may not be purchased and used in several countries. The user is responsible for abiding all the local and international laws.

COPYRIGHTS AND PATENTS

Title: uMobility User's Guide – Apple iPhone™ and iPod Touch™ 2.0.1

Confidential

© 2003-2009 Varaha Systems, Inc.

Page 36 of 39



All title and copyrights in and to the SOFTWARE PRODUCT (including but not limited to any images, photographs, animations, video, audio, music, text, and "applets" incorporated into the SOFTWARE PRODUCT), the accompanying printed materials, and any copies of the SOFTWARE PRODUCT are owned by Varaha Systems or its suppliers. The SOFTWARE PRODUCT is protected by copyright, including without limitation by United States Copyright Law, international treaty provisions and applicable laws in the country in which it is used. You may not copy the SOFTWARE PRODUCT, except as provided in Section 1. Any copies that you are permitted to make under this EULA must contain the same copyright and other proprietary notices that appear on or in the SOFTWARE PRODUCT.

If a third party claims that a SOFTWARE PRODUCT Varaha Systems provides to you infringes that party's patent or copyright, Varaha Systems will, at its expense, defend you against that claim and pay all costs, damages, and attorney's fees that a court finally awards, provided that you 1) promptly notify Varaha Systems in writing of the claim and 2) allow Varaha Systems to control, and cooperate with Varaha Systems in, the defense and any related settlement negotiations. If such a claim is made or appears likely to be made, you agree to permit Varaha Systems to enable you to continue to use the SOFTWARE PRODUCT, or to modify it, or replace it with one that is at least functionally equivalent. If Varaha Systems determines that none of these alternatives is reasonably available, you agree to return the SOFTWARE PRODUCT to Varaha Systems on Varaha Systems' written request. Varaha Systems will then give you a credit for a one-time charge SOFTWARE PRODUCT, provided its total charges have been fully paid. This is Varaha Systems' entire obligation to you regarding any claim of infringement. Varaha Systems has no obligation regarding any claim based on any of the following: 1) the modification of a SOFTWARE PRODUCT; 2) the combination, operation, or use of a SOFTWARE PRODUCT with any programs, data, or apparatus that Varaha Systems did not provide; or 3) infringement by a non- Varaha Systems Program.

MULTIPLE-MEDIA SOFTWARE

You may receive the SOFTWARE PRODUCT in more than one medium. Regardless of the type or size of medium you receive, you may use only one medium that is appropriate for the single compatible device or compatible computer. You may not use or install the other medium on another compatible device or compatible computer. You may not loan, rent, lease, or otherwise transfer the other medium to another user, except as part of the permanent transfer (as provided above) of the SOFTWARE PRODUCT.

CHARGES, PAYMENTS AND TAXES.

Payment must be made to the party from whom you acquired the SOFTWARE PRODUCT. If you acquired the SOFTWARE PRODUCT from VARAHA SYSTEMS, you agree to pay as specified by VARAHA SYSTEMS. If any authority imposes a duty, tax, levy or fee on the SOFTWARE PRODUCT supplied under this Agreement, you agree to pay that amount as Varaha Systems specifies or supply appropriate exemption documentation. No refunds or credits for charges already due or paid.

LIMITED WARRANTY

Varaha Systems warrants that (a) the SOFTWARE PRODUCT will perform substantially in accordance with the accompanying printed or electronic materials for a period of ninety (90) days from the date of receipt, and (b) any Support Services provided by Varaha Systems under separately purchased subscription shall be of professional quality provided in a professional manner. To the extent allowed by applicable law, implied warranties on the SOFTWARE PRODUCT, if any, are limited to ninety (90) days. Some states/jurisdictions do not allow limitations on duration of an implied warranty, so the above limitation applies to only one device, appliance or system that the software is initially installed on.

CUSTOMER REMEDIES

If the SOFTWARE PRODUCT does not perform in accordance with the warranties described above, Varaha Systems' entire liability and the exclusive remedy shall be, at Varaha Systems's option, either (a) return of the license fee paid, if any, or (b) repair or replacement of the SOFTWARE PRODUCT. To make a warranty claim, you must return the SOFTWARE PRODUCT to the place of purchase, together with proof of purchase, within the 90-day warranty period. The warranties are void if failure of the SOFTWARE PRODUCT has resulted from accident, abuse, misapplication, an incompatible operating environment, an incompatible device or unauthorized use. Any replacement SOFTWARE PRODUCT will be warranted for the remainder of the original warranty period or thirty (30) days, whichever is greater.

NON-AVAILABILITY of TRADITIONAL EMERGENCY ACCESS SERVICES (such as 911 in the US or 999 in the UK)



The uMobility solution does not support traditional emergency access services (EAS), for example 911 or E911 in the US or 999 in the UK, and therefore the user should route emergency calls through the cellular network only rather than the voice over IP facilities. The distributor of the uMobility software, the customers of the uMobility software and any such parties shall inform all end users, guests and other third persons, who may or may not be present at the physical location where you utilize the service, of the non-availability of traditional EAS in all circumstances through uMobility software. The end user of the software does understand the limitation here in and shall plan for EAS while using the uMobility software in their country as well as while roaming to different countries, networks, and other such locations either with or without provision for EAS services.

NO OTHER WARRANTIES

To the maximum extent permitted by applicable law, Varaha Systems disclaims all other warranties and conditions, either express, implied, or statutory, by operation of law, or otherwise, including, but not limited to, implied warranties of merchantability, fitness for a particular purpose, title and non-infringement, with regard to the SOFTWARE PRODUCT and the provision of or failure to provide Support Services. This limited warranty gives you specific legal rights. You may have others, which vary by jurisdiction.

LIMITATION OF LIABILITY

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, IN NO EVENT SHALL VARAHA SYSTEMS OR ITS SUPPLIERS, DISTRIBUTORS BE LIABLE FOR ANY SPECIAL, INCIDENTAL, INDIRECT, OR CONSEQUENTIAL DAMAGES WHATSOEVER (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, LOSS OF BUSINESS INFORMATION, OR ANY OTHER PECUNIARY LOSS) ARISING OUT OF THE USE OF OR INABILITY TO USE THE SOFTWARE PRODUCT OR THE FAILURE TO PROVIDE SUPPORT SERVICES, EVEN IF VARAHA SYSTEMS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. IN ANY CASE, VARAHA SYSTEMS' ENTIRE LIABILITY UNDER ANY PROVISION OF THIS EULA SHALL BE LIMITED TO THE GREATER OF THE AMOUNT ACTUALLY PAID BY YOU FOR THE SOFTWARE PRODUCT OR U.S.\$5.00; PROVIDED, HOWEVER, IF YOU HAVE ENTERED INTO A VARAHA SYSTEMS SUPPORT SERVICES AGREEMENT, VARAHA SYSTEMS' ENTIRE LIABILITY REGARDING SUPPORT SERVICES SHALL BE GOVERNED BY THE TERMS OF THAT AGREEMENT. BECAUSE SOME JURISDICTIONS DO NOT ALLOW THE EXCLUSION OR LIMITATION OF LIABILITY, THE ABOVE LIMITATION MAY NOT APPLY TO YOU.

Varaha Systems will not be liable for 1) loss of, or damage to, the records or data or 2) any damages claimed by you based on any third party claim. This limitation of liability also applies to any developer of a SOFTWARE PRODUCT supplied to Varaha Systems. It is the maximum for which we are collectively responsible.

U.S. GOVERNMENT RIGHTS

Use, duplication, or disclosure by the United States Government or its contractors of the SOFTWARE PRODUCT is subject to the restrictions and protections set forth in this EULA as provided for in DFAR 52.227-14 or DFAR 252.227-7013, as applicable, or any successor regulation or as set forth in the particular governmental regulations which provide Varaha Systems with protection equivalent or greater than these provisions. All rights not expressly granted are reserved.

EXPORT RESTRICTIONS

You acknowledge that the SOFTWARE PRODUCT licensed hereunder is subject to the export control laws and regulations of the U.S.A., and any amendments thereof. You agree that you will not export or re-export the SOFTWARE PRODUCT, any part thereof, or any process or service that is the direct product of the SOFTWARE PRODUCT (the foregoing collectively referred to as the "Restricted Components"), in any manner prohibited by the Export Administration regulations of the United States Department of Commerce or any other export laws, restrictions or regulations. You specifically agree not to export or re-export Restricted Components (i) to any country to which the U.S. embargoes or restricts export of the SOFTWARE PRODUCT (including without limitation Cuba, Iran, Iraq, Libya, North Korea, Sudan and Syria) or to any national of any such country who you know intends to transmit or transport the Restricted Components back to such country; (ii) to any person or entity that you know or have reason to know has been prohibited from participating in U.S. export transactions by any federal agency of the U.S. government.

LAWS; JURISDICTION

If you licensed the SOFTWARE PRODUCT in the United States, this EULA is governed by the laws of the State of Delaware. If you licensed the SOFTWARE PRODUCT in any other country, then local law may apply.



NOTE: Product registration includes transmitting the following installation information to the Varaha registration server: the device MAC address and configuration details including but not limited to the application version number, site key, user name, proxy, domain and organization.